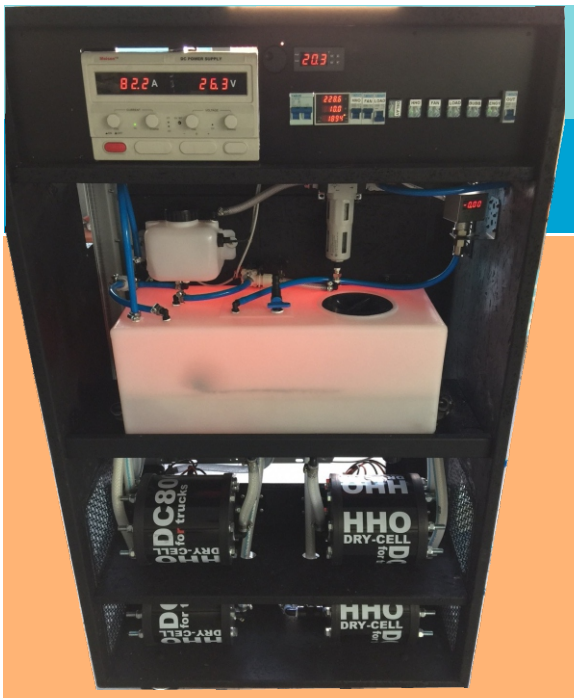


HHO-W3000

HIGH Efficency HHO Gas Generator

Standalone HHO Generator with Low Powersupply and High Efficency HHO Flow rate, up to 30+ Litre Gas Pro Minute!

Our products are designed and manufactured in the European Union in our Company LIONSTRACS, in compliance with technical standards and industrial manufacturing of such products.

The new HHO-W3000 is designed to constantly feed systems Biomass with petrol engines , to reduce production costs, increase the production of electricity and dramatically reduce emissions of carbon monoxide.
With only 2000W powersupply for the whole system, it is possible to generate 22+ LPM HHO Gas, amount more than sufficient to power high power motors.
HHO Generators of other manufacturers , require at least 6000W to generate the same amount of HHO gas , that while our model requires only 2000W !

The HHO-W3000 can also be combined with thermal boilers fueled with natural gas or oil , having an energy saving that can exceed 50 % !
The HHO-W3000 is strongly recommended for the homes of at least six apartments with boilers fired power Gas methane or better yet to Oil .
Hotels with wellness , sauna , swimming pools , require a large amount of fuel , with our HHO-W3000 you have the chance to save at least 50% of these fuels .
Heating should be affordable with the less cost as possible!

HHO-W3000 and your benefits:
Significant reduction of oil or gas consumption , as well as other fuels by an average of 30 - 40 %, Plant-specific possible by up to 50+ % by increase the power supply wattage.
Significant reduction of polluting emissions, strategic advantage with repeated supply crises , because you get along with your stock much longer
Ingenious: you only need some power and distilled water no utilities necessary.

Hydrogen Support:
All heating systems can be retrofitted with a hydrogen support.
Such a system produced on the basis of electrolytic hydrogen which is fed to the combustion process supportive. The hydrogen in this case acts as an additive :
It changes the calorific value of the fuel and thus increases the technical efficiency of your heating system . So that you get from the first minute to the benefits described overleaf .

SPECIFICATION

*Generator Type: 4 X Dry Cells working @24V
* Dry Cells with 56 plates in 316L stainless steel
*Total area for gas production: 4x9485 cm2
* Watertank in Polypropylene (30 liters)
* Input Voltage: 220V, 50/60Hz Two phase
* Rated Capacity: Up to 3000W (3 Kwh)
* Maximun amperage: 125A @24V (Pot Adjust)
* Rated GAS Production (L/h):1800 (<30 LPM)
* Water Consumption (L/h): 0.8 L
* Water Feed: Automatic with 12V Pump.
* Cooling mode: 6 Kw Fan Coil Water Cooling.
* Working Medium: Filtered/deionized Water
* Working Method: Continuos 24h no stop.
* Pump for forcing HHO Cell Water circulation
* Pump for Fan Coil Water Cooling
* Low and High Water Tank Level Sensor
* 2 HHO Water Filter
* LZB-10 HHO GAS Realtime Flow Meter
* RGB LED Backlight on Water Tank.

CONTROL PANEL

* DIN Rail control panel with DIN Termial Block
* Control Panel work with Low Voltage: 12V
* External Remote Control ON/OFF Generator
* Main C25-A Automatic Circuit Breaker
* Main HHO Generator Circuit Breaker
* Main FAN Circuit Breaker
* Main LOAD Water Auto Feed Circuit Breaker
* Programmable Start delay: 0>60 second
* Digital Pressure Controller: High and Vacum
* Digital Programm. Water Cooling Termostat

* Operating Temperature Range: 1 to +45 °C
* Outline Dimension- L*W*H: 85X50X160 Cm
* Gross Weight: 240 Kg (water not included)
* 2 Years Europe Warranty

YOUTUBE VIDEO LINK:

http://youtu.be/ocHdVWstJOU





For more information contact: LIONSTRACS Italy
Via Zuegg 44 - 39012 Merano , ITALY
Email: sales@lionstracs.com Phone: +390473446510
www.lionstracs.com

LIONSTRACS.COM